


Coil Specification (at 20 °C):




Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 10\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
GJ-D GJ-DM	3	150	20	Abt. 0.45	75% Maximum	5% Minimum	120%
	5	91	55				
	6	75	80				
	9	50	180				
	12	37.5	320				
GJ-LM	24	18.8	1,280	Abt. 0.2			
	3	67	45				
	5	40	125				
	6	33.3	180				
	9	22.5	400				
	12	16.7	720				
	24	8.3	2,800				

Ordering Information:

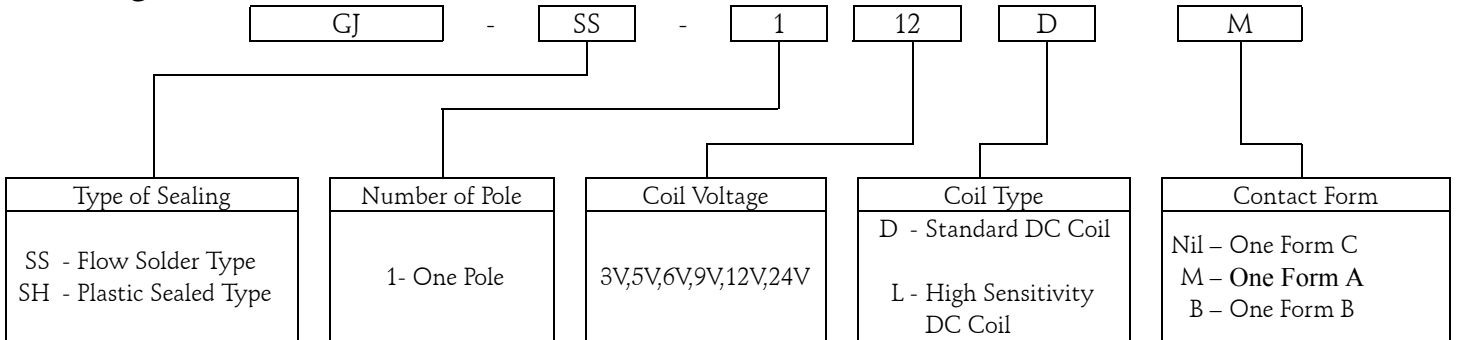


Dimension:

GJ-SS/SH-D






BOTTOM VIEW




BOTTOM VIEW

GJ-SS/SH-DM(LM)



BOTTOM VIEW



BOTTOM VIEW