


Coil Specification (at 20 °C):

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 10\%$)	Power Consumption (mW)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
ST-D	3	120	25	Abt.0.36	75% Maximum	5% Minimum	130%
	5	71.4	70				
	6	60	100				
	9	40	225				
	12	30	400				
	24	15	1,600				
ST-T	3	67	45	Abt.0.2	75% Maximum	5% Minimum	130%
	5	40	125				
	6	33.3	180				
	9	22.5	400				
	12	16.7	720				
	24	8.3	2,880				
ST-L	3	50	60	Abt.0.15	80% Maximum	5% Minimum	130%
	5	29.9	167				
	6	25.0	240				
	9	16.7	540				
	12	12.5	960				
	24	6.25	3,840				

Ordering Information:

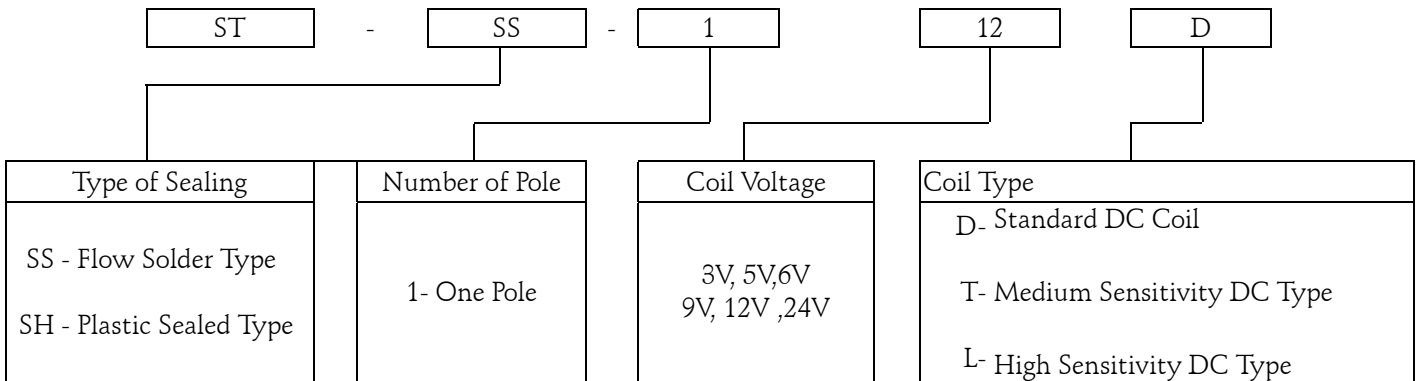

Dimension:

ST-SS/SH

